

27MG

Ultrasonic Thickness Gage



- Dual element corrosion gaging
- Large backlit LCD display
- Rugged handheld design

27MG

Ultrasonic Thickness Gage

The Olympus 27MG instrument is an affordable ultrasonic thickness gage designed to make accurate measurements from one side on internally corroded or eroded metal pipes, tanks, and other equipment. It weighs only 12 oz. (340 g) and is ergonomically designed for easy one-handed operation. Despite its compact size, the 27MG thickness gage has many innovative measurement features utilizing the same technologies that are available on our more advanced thickness gages. The durable, rugged 27MG gage is battery-operated and features a large, backlit LCD with easy-to-read numerals and an intuitive color-coded keypad with direct access to many key features.

Standard features include Automatic Probe Recognition to help ensure optimal transducer performance, Auto Zero compensation to enhance the accuracy of measurements on hot surfaces, Gain Adjust to improve measurements on sound-attenuating materials such as cast metals, Differential mode, Hi-Low Alarm settings, and a Min./Max. mode that captures the minimum or maximum thickness at 20 measurements per second.

The 27MG gage is designed for inspectors and maintenance engineers that need to monitor the wall thickness in metal pipes, tanks, beams, and structural supports that are susceptible to corrosion on the inside surface. An ultrasonic thickness gage provides a quick, cost-effective solution by transmitting sound into the material from the outside, making it unnecessary to damage the part.

Transducers

The 27MG thickness gages comes standard with the low-cost D7910 dual element transducer that enables you to make thickness measurements for many basic corrosion applications. For measurements on very thin or thick materials, or small diameter pipes, Olympus has a full line of dual element transducers. Olympus transducers compatible with the 27MG gage feature Automatic Probe Recognition that optimizes transducer performance by automatically recalling the default V-path correction.



The D7910 transducer offers great performance at an affordable price.

Transducers with Automatic Probe Recognition


The 27MG thickness gage is compatible with our complete line of easy interchangeable dual element transducers that vary in frequencies, diameters, and temperature capabilities to deal with virtually every application.

Transducer	Item Number	Freq. (MHz)	Connector	Tip Dia. mm (in.)	Range (Steel)* mm (in.)	Temp. Range** °C (°F)	Cable	Item Number
D7910	U8454038	5.0	90°	12.7 (0.500)	1.00 to 254 (0.040 to 10.000)	0 to 50 (32 to 122)	Potted	—
D790	U8450002	5.0	Straight	11.00 (0.434)	1.00 to 500.00 (0.040 to 20.000)	-20 to 500 (-5 to 932)	Potted	—
D790-SM	U8450009		Straight				LCMD-316-5B†	U8800353
D790-RL	U8450007		90°				LCLD-316-5G†	U8800330
D790-SL	U8450008		Straight				LCLD-316-5H	U8800331
D791	U8450010	5.0	90°	11.00 (0.434)	1.00 to 500.00 (0.040 to 20.000)	-20 to 500 (-5 to 932)	Potted	—
D791-RM	U8450011	5.0	90°	11.00 (0.434)	1.00 to 500.00 (0.040 to 20.000)	-20 to 400 (-5 to 752)	LCMD-316-5C	U8800354
D7912	Q4530005	10.0	Straight	7.50 (0.295)	0.50 to 25.00 (0.020 to 1.000)	0 to 50 (32 to 122)	Potted	—
D7913	Q4530006		90°					
D797	U8450016	2.0	90°	22.90 (0.900)	3.80 to 635.00 (0.150 to 25.000)	-20 to 400 (-5 to 752)	Potted	—
D797-SM	U8450017		Straight				LCMD-316-5D	U8800355
D7226	U8454013	7.5	90°	8.90 (0.350)	0.71 to 50.00 (0.028 to 2.000)	-20 to 150 (-5 to 300)	Potted	—
D798-LF	U8450019							
D798	U8450018	7.5	90°	7.20 (0.283)	0.71 to 50.00 (0.028 to 2.000)	-20 to 150 (-5 to 300)	Potted	—
D798-SM	U8450020		Straight				LCMD-316-5J	U8800357
D799	U8450021	5.0	90°	11.00 (0.434)	1.00 to 500.00 (0.040 to 20.000)	-20 to 150 (-5 to 300)	Potted	—

* Dependent on material, transducer type, surface conditions, and temperature. Full range may require Gain adjustment.

† Stainless steel cable available; consult Olympus for details.

** Maximum temperature with intermittent contact only.

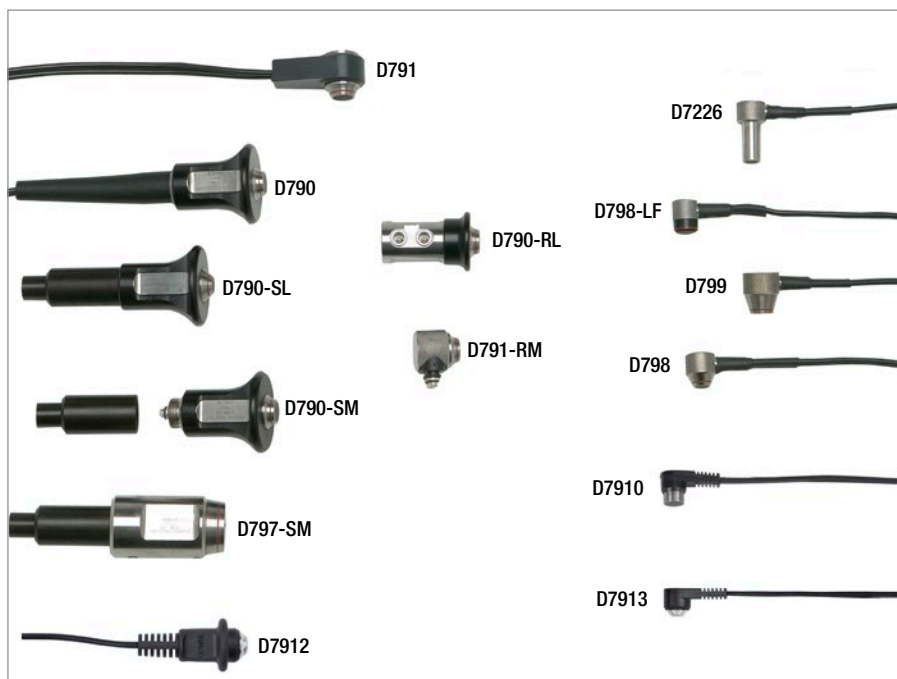

27MG Specifications*

Measurements

Dual element transducer measurement mode	Time interval from a precision delay after the excitation pulse to the first echo
Thickness range	0.50 mm to 635 mm (0.020 in. to 25.0 in.) depending on material, transducer, surface conditions, temperature
Material velocity range	0.508 mm/ μ s to 18.699 mm/ μ s (0.020 in./ μ s to 0.7362 in./ μ s)
Resolution (selectable)	Low: 0.1 mm (0.01 in.) Standard: 0.01 mm (0.001 in.)
Transducer frequency range	2.25 MHz to 10 MHz (-3 dB)

General

Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)
Keypad	Sealed, color-coded keypad with tactile and audible feedback
Case	Impact-resistant and water-resistant, gasketed case with sealed connectors. Designed for IP65.
Dimensions (W x H x D)	84.0 mm x 152.4 mm x 39.6 mm (3.31 in. x 6.0 in. x 1.56 in.)
Weight	340 g (12 oz)
Power supply	3 AA alkaline batteries
Battery life operating time	150 h of typical battery life, 30 h continuous use with backlight
Explosive Atmosphere	Tested using MIL-STD-810F 511.4 Procedure I
Standards	Designed for EN15317
Alarm mode	Programmable Hi/Low set points with audible and visual indicators

Display

Display Hold/Blank mode	Holds or blanks the display after measurements
Backlight	Electroluminescent backlight, Selectable as On or Auto On
Receiver bandwidth	1 MHz to 18 MHz (-3 dB)
Metric/English mode	Metric or English units
Display languages	English, French, German, Spanish, Italian, Portuguese, Russian, Polish, and Swedish

Optional Accessories

- **2214E (U8880014):** 5-step test block, English units
- **2214M (U8880016):** 5-step test block, metric units
- **27MG/RPC (U8780343):** Protective rubber boot with Neck Strap and Gage Stand

For additional accessories such as holders, wands, and couplants, please consult Olympus.

Standard Package

- 27MG digital ultrasonic thickness gage
- Dual element transducer
- AA alkaline batteries
- Test block and couplant
- Carrying case
- Wrist strap
- User's manual on CD
- Getting started guide
- **Measurement features:** Min./Max. mode, Differential mode, Gain Adjust, Freeze mode, Automatic Probe Recognition, Zero Compensation

Standard inclusions may vary depending on your location. Contact your local distributor.



27MG with the optional Protective Rubber Boot with Neck Strap and Gage Stand

www.olympus-ims.com

OLYMPUS

For inquiries - contact
www.olympus-ims.com/contact-us

OLYMPUS CORPORATION OF THE AMERICAS
48 Woerd Avenue, Waltham, MA 02453, USA, Tel.: (1) 781-419-3900
110 Magellan Circle, Webster TX, 77598, USA, Tel.: (1) 281-922-9300
OLYMPUS NDT CANADA INC.
505, boul. du Parc-Technologique, Québec (Québec) G1P 4S9, Tel.: (1) 418-872-1155
1109 78 Ave, Edmonton (Alberta) T6P 1L8

OLYMPUS SCIENTIFIC SOLUTIONS AMERICAS CORP.
is ISO 9001 and 14001 certified

*All specifications are subject to change without notice.
All brands are trademarks or registered trademarks of their respective owners and third party entities.
Copyright © 2021 by Olympus.

